


REV.	ECN NO	DATE
C	CN6062	07-26-'06
D	CN6091	08-15-'06
E	CN8019	03-20-'08
F	CN8035	05-30-'08

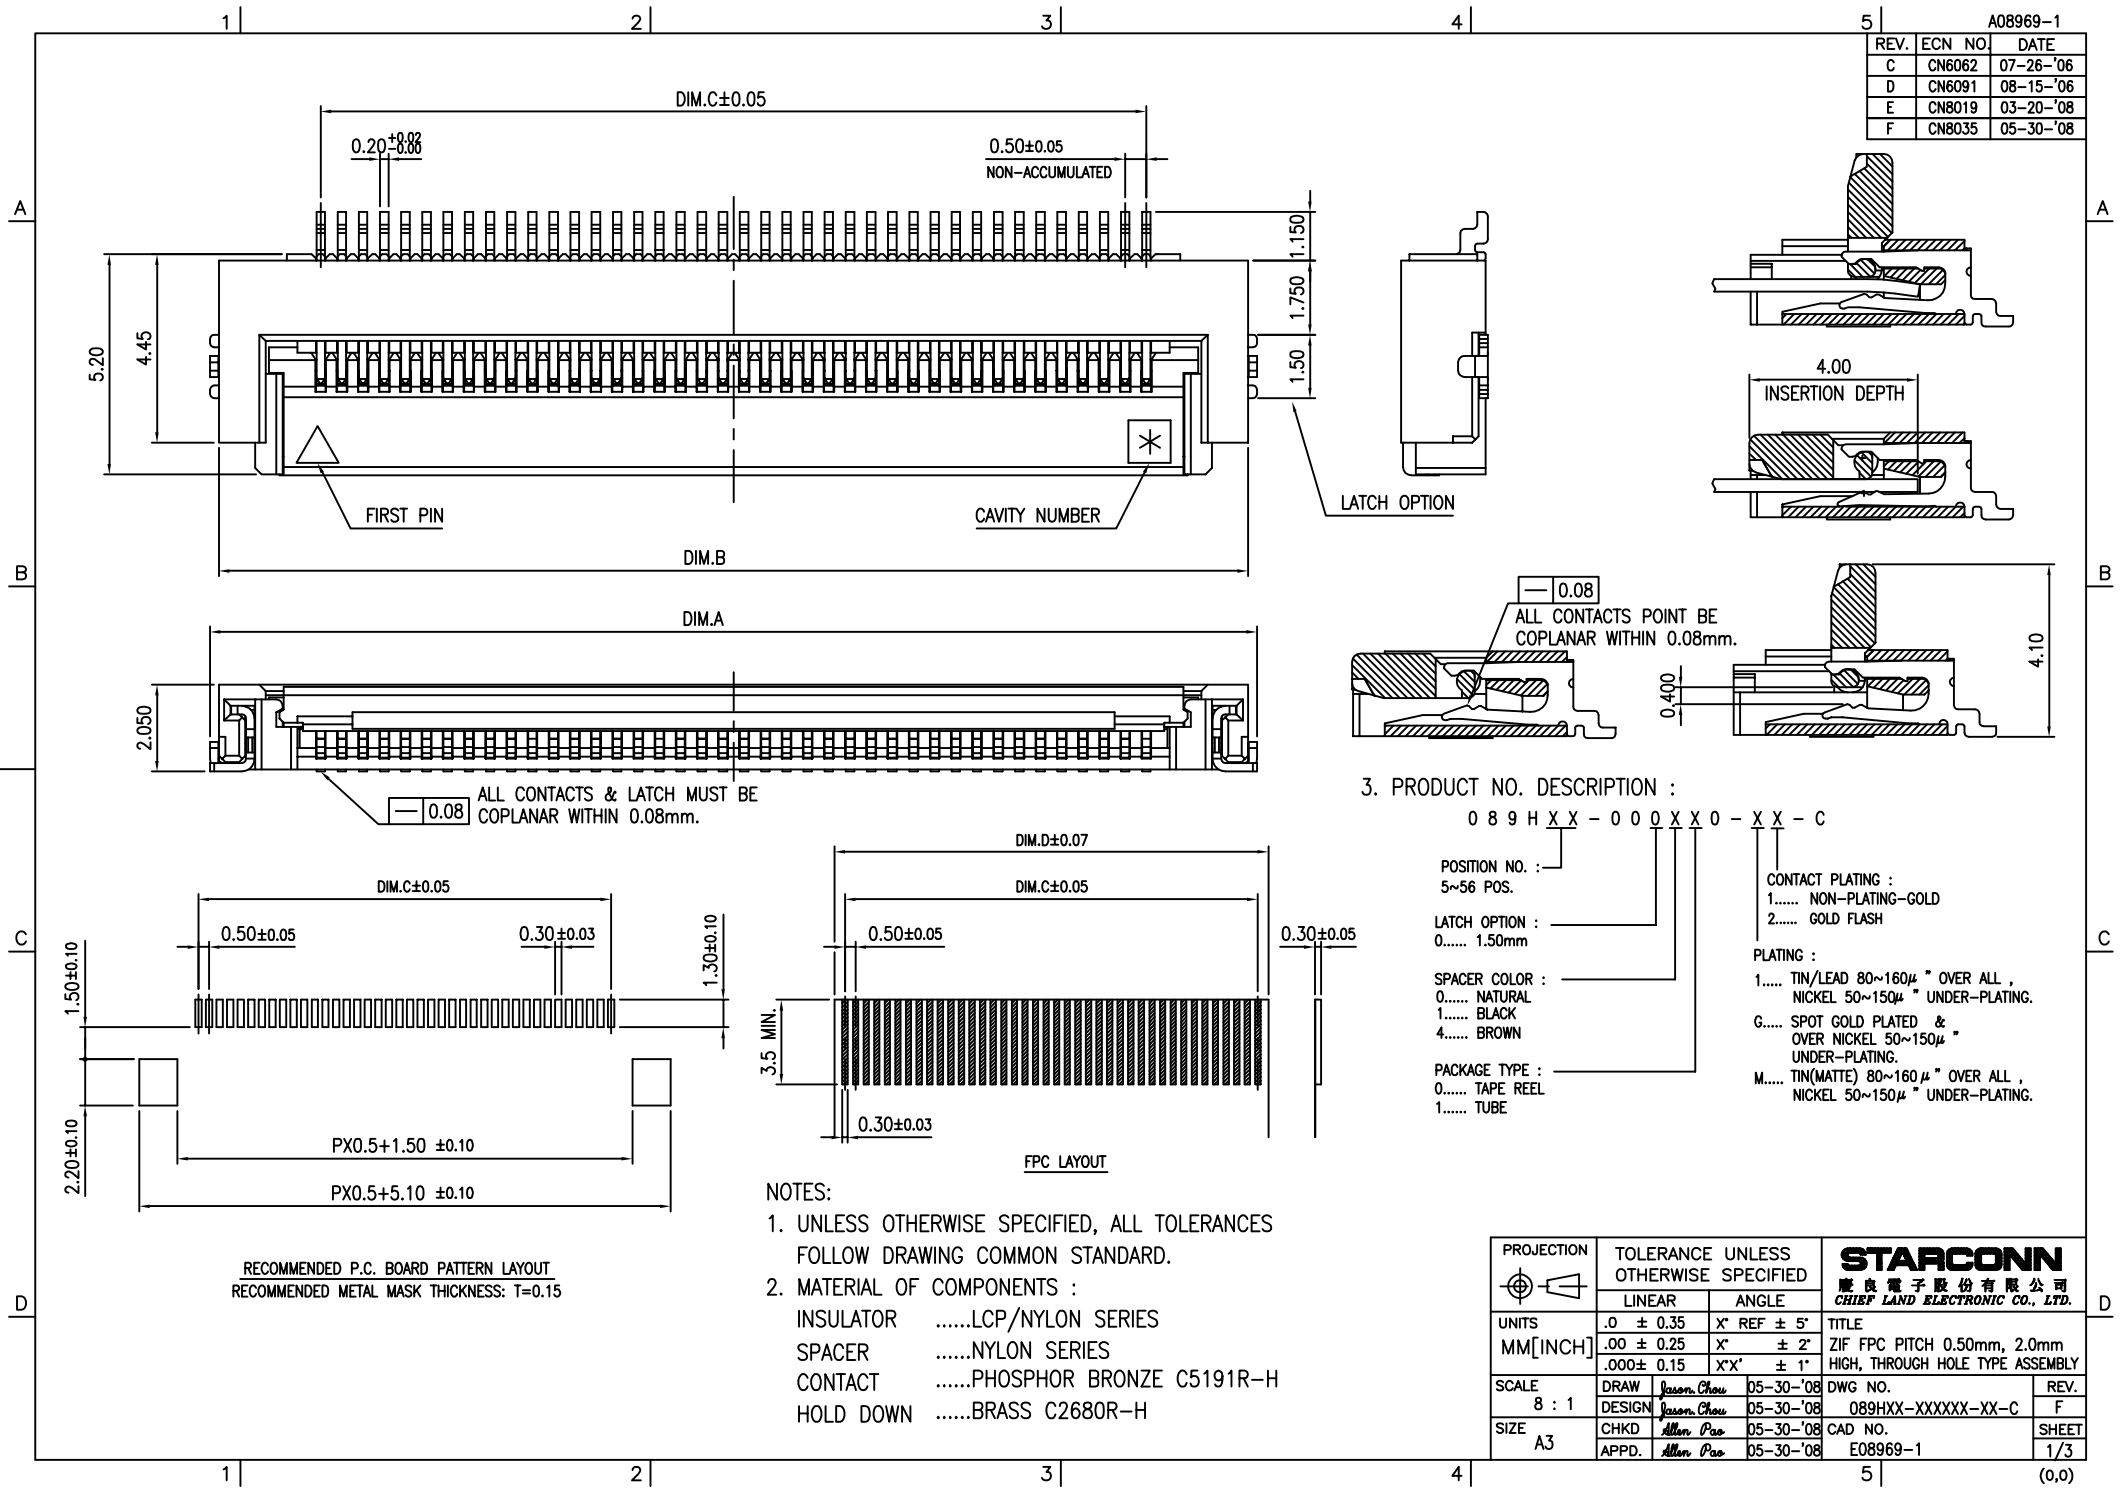

3. PRODUCT NO. DESCRIPTION :

0 8 9 H X X - 0 0 X X 0 - X X - C

- POSITION NO. : 5~56 POS.
- LATCH OPTION : 0..... 1.50mm
- SPACER COLOR : 0..... NATURAL
1..... BLACK
4..... BROWN
- PACKAGE TYPE : 0..... TAPE REEL
1..... TUBE

- CONTACT PLATING : 1..... NON-PLATING-GOLD
2..... GOLD FLASH
- PLATING : 1..... TIN/LEAD 80~160µ " OVER ALL ,
NICKEL 50~150µ " UNDER-PLATING.
- G..... SPOT GOLD PLATED &
OVER NICKEL 50~150µ "
UNDER-PLATING.
- M..... TIN(MATTE) 80~160µ " OVER ALL ,
NICKEL 50~150µ " UNDER-PLATING.

- NOTES:
- UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
 - MATERIAL OF COMPONENTS :
INSULATORLCP/NYLON SERIES
SPACERNYLON SERIES
CONTACTPHOSPHOR BRONZE C5191R-H
HOLD DOWNBRASS C2680R-H

RECOMMENDED P.C. BOARD PATTERN LAYOUT
RECOMMENDED METAL MASK THICKNESS: T=0.15

PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE	
	LINEAR	ANGLE		
MM[INCH]	.0 ± 0.35	X° REF ± 5°	ZIF FPC PITCH 0.50mm, 2.0mm HIGH, THROUGH HOLE TYPE ASSEMBLY	
	.00 ± 0.25	X' ± 2'		
	.000 ± 0.15	X'X' ± 1'		
SCALE	DRAW	DESIGN	DWG NO.	REV.
8 : 1	Jason Chau	Jason Chau	05-30-'08	089HXX-XXXXXX-XX-C
SIZE	CHKD	APPD.	CAD NO.	SHEET
A3	Allan Pao	Allan Pao	05-30-'08	1/3
			E08969-1	(0,0)

STARCONN
 廣康電子股份有限公司
 CHIEF LAND ELECTRONIC CO., LTD.